

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
28-63V DC	12V DC	5 Amps	60 Watts	94%	57*64*22mm



Features

- Design meeting RoHS / CE
- High efficiency: 94% (@ 36V input)
- Non-isolated between input and output
- Internal capacitor: NCC & NICHICON (high reliability)
- 100% full load burn-in test
- Short circuit, Over load, Over temperature protections
- Waterproof level IP68
- 1 Year warranty

Applications

- Trucks
- Forklifts
- Buses
- Logging Vehicles
- Electromotor
- Telecommunications
- Boat & Yacht
- LED Marketplaces and so on..

Model naming method


WG-36S1205

- Output Max. rated current
- Output rated voltage
- Input rated voltage
- "WenGao" abbreviation

Specifications

Model	WG-36S1205		
Input	Rated voltage	V	36
	Voltage range	V	28-63
	Efficiency (type)	%	94% @ 36V input
	Positive cable (red)	AWG	18 @ 16.5cm length
	Negative cable (black)	AWG	18 @ 16.5cm length
Output	Voltage	V	12
	Max. rated current	A	5
	Max. rated power	W	60
	Voltage regulation	%	±1
	Load regulation	%	2
	No load loss	W	0.96 @ 36V input
	Ripple & noise	mV	70
	Positive cable (yellow)	AWG	18 @ 16.5cm length
	Negative cable (black)	AWG	18 @ 16.5cm length
Environment	Working temperature	°C	-40 ~ +80
	Working humidity	RH	10% ~ 90%
	Storage temperature	°C	-40 ~ +100
Function	Short circuit protection		YES
	Over current protection	A	@ 6~8
	Waterproof		IP68
	Over temperature protection		YES
	Over voltage protection		YES
Mechanical	Weight	g	108
	Size	mm	57*64*22
Other	Cooling		Free air convection
	Packaging		White box

 Dimension

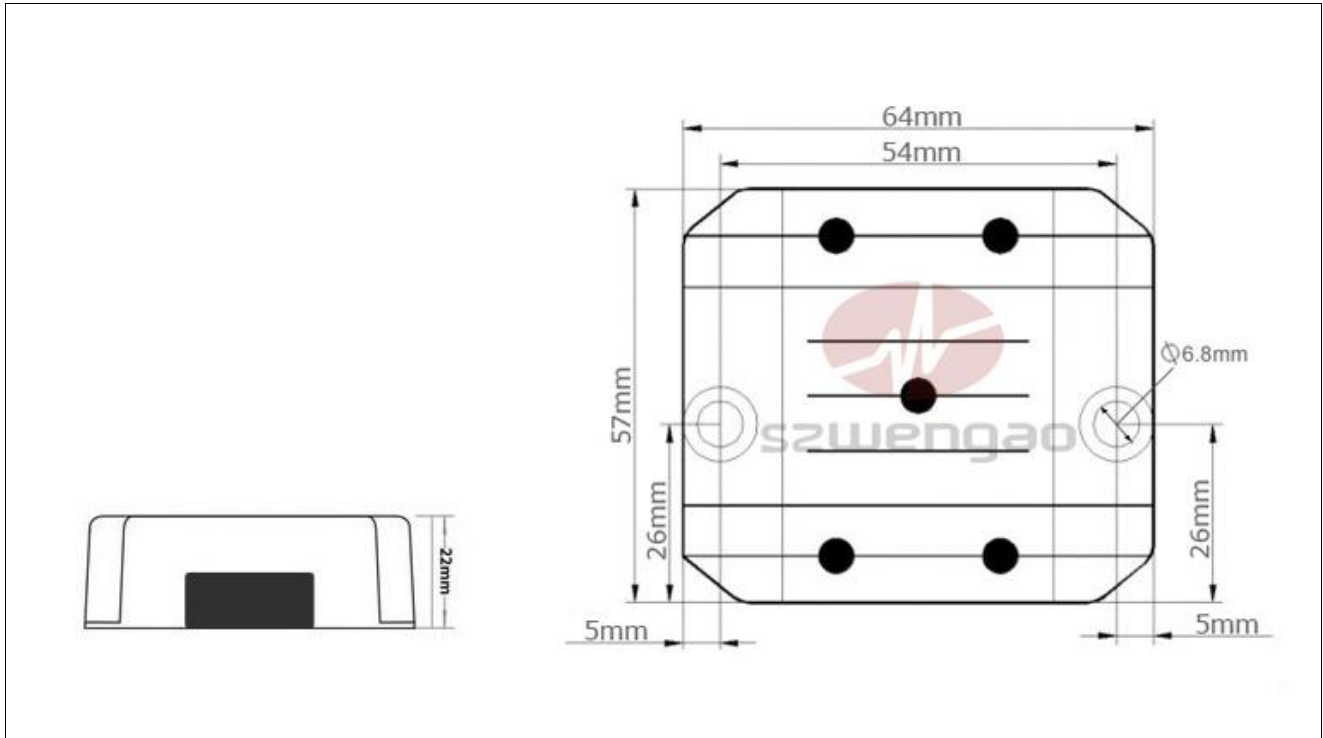

Shenzhen Wengao Electronic Co., Ltd

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061 F: +86 755 29418061 E: info@wengaoelec.com W: www.wengaoelec.com