


Input voltage	Output voltage	Output current	Output power	Efficiency	Size
30-75V DC	12V DC	15 Amps	180 Watts	95%	74*74*32mm

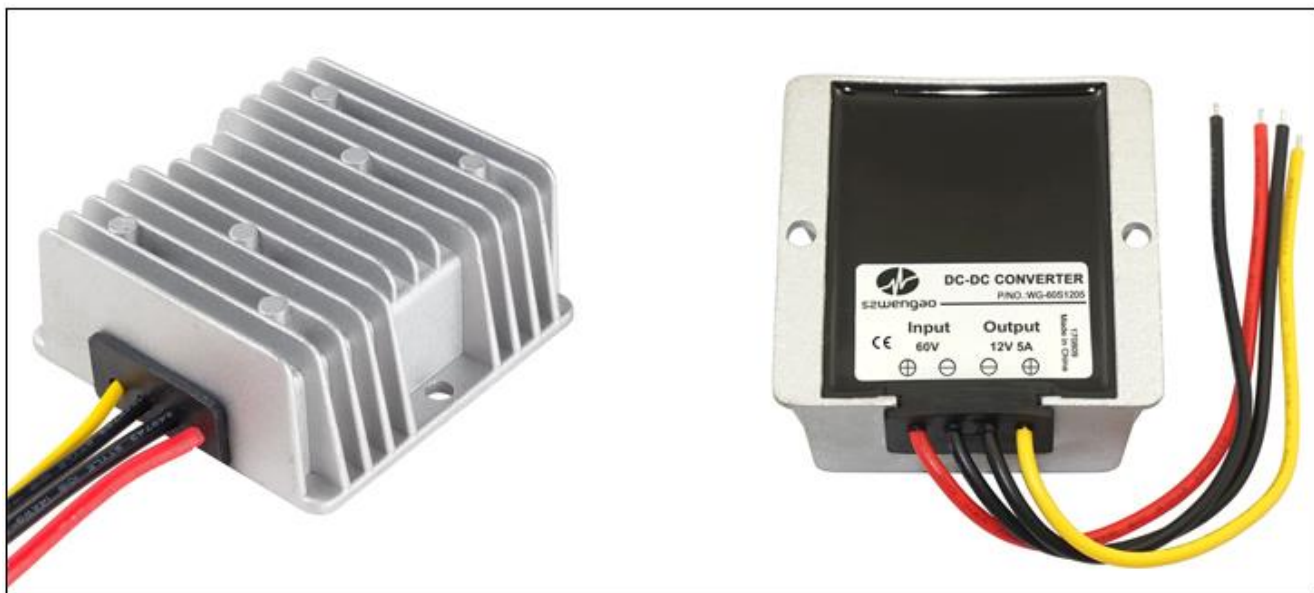

Features

- Design meeting RoHS / CE
- High efficiency: 95% (@ 60V input)
- Non-isolated between input and output
- Internal capacitor, high reliability
- 100% full load burn-in test
- Over load, Over temperature and Over voltage protections
- Waterproof level IP68
- 1 Year warranty

Applications

- Trucks
- Forklifts
- Buses
- Logging Vehicles
- Electromotor
- Telecommunications
- Boat & Yacht
- LED Marketplaces and so on..

Model naming method

WG-60S1215

- Output Max. rated current
- Output rated voltage
- Input rated voltage
- "WenGao" abbreviation

Specifications

Model	WG-60S1215		
Input	Rated voltage	V	60
	Voltage range	V	30-75
	Efficiency (type)	%	95 @ 60V input
	Positive cable (red)	AWG	16 @ 15cm length
	Negative cable (black)	AWG	16 @ 15cm length
Output	Voltage	V	12
	Max. rated current	A	15
	Max. rated power	W	180
	Voltage regulation	%	±1
	Load regulation	%	2
	No load loss	mA	70 @ 60V input
	Ripple & noise	mV	120 (full load)
	Positive cable (white)	AWG	16 @ 15cm length
	Negative cable (black)	AWG	16 @ 15cm length
Environment	Working temperature	°C	-40 ~ +80
	Working humidity	RH	10% ~ 90%
	Storage temperature	°C	-40 ~ +100
Function	Short circuit protection		YES
	Over current protection	A	YES
	Waterproof		IP68
	Over temperature protection		YES
	Over voltage protection		YES
Mechanical	Weight	g	300
	Size	mm	74*74*32
Other	Cooling		Free air convection
	Packaging		White box




szwengao

DC-DC Converter Specification

Model No.:WG-60S1215

Dimension

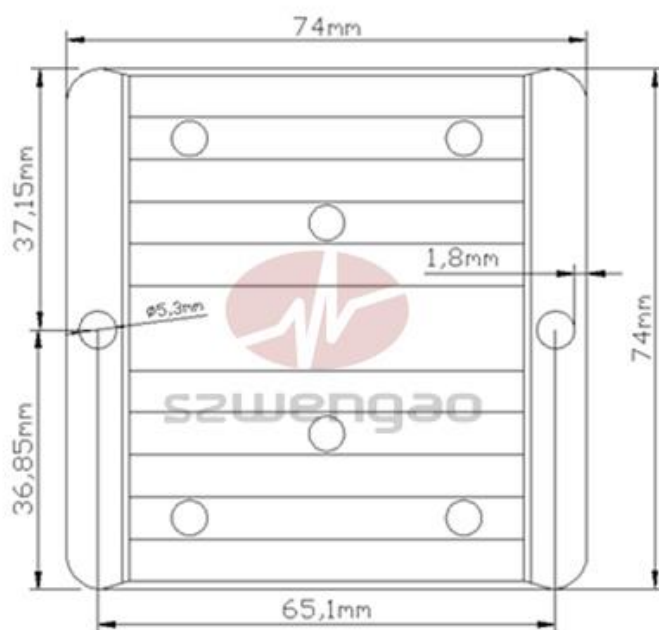

Shenzhen Wengao Electronic Co., Ltd

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061

F: +86 755 29418061

E: info@wengaoelec.com

W: www.wengaoelec.com