

Input voltage	Output voltage	Output current	Output power	Efficiency	Size
18-36V DC	24V DC	15 Amps	360 Watts	95%	100*80*39mm




Features

- Design meeting RoHS / CE
- High efficiency: 95% (@ 24V input)
- Non-isolated between input and output
- Internal capacitor: NCC & NICHICON (high reliability)
- 100% full load burn-in test
- Short circuit, Over load, Over temperature protections
- Waterproof level IP68
- 1 Year warranty

Applications

- Trucks
- Forklifts
- Buses
- Logging Vehicles
- Electromotor
- Telecommunications
- Boat & Yacht
- LED Marketplaces and so on..


Model naming method

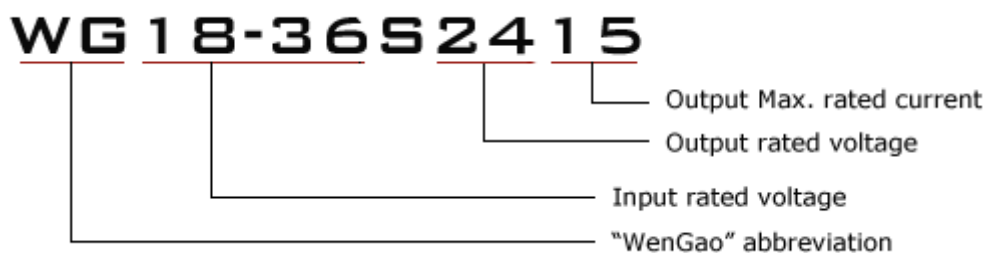

Specifications

Model	WG18-36S2415		
Input	Rated voltage	V	24
	Voltage range	V	18-36
	Efficiency (type)	%	95% @ 24V input
	Positive cable (red)	AWG	12 @ 16.5cm length
	Negative cable (black)	AWG	12 @ 16.5cm length
Output	Voltage	V	24
	Max. rated current	A	15
	Max. rated power	W	360
	Voltage regulation	%	±1
	Load regulation	%	2
	No load loss	mA	70
	Ripple & noise	mVp-p	180
	Positive cable (white)	AWG	14 @ 16.5cm length
	Negative cable (black)	AWG	14 @ 16.5cm length
Environment	Working temperature	°C	-35 ~ +80
	Working humidity	RH	10% ~ 90%
	Storage temperature	°C	-40 ~ +100
Function	Short circuit protection		YES
	Over current protection		YES
	Waterproof		IP68
	Over temperature protection		YES
	Over voltage protection		YES
Mechanical	Weight	g	500
	Size	mm	100*80*39
Other	Cooling		Free air convection
	Packaging		White box

 Dimension

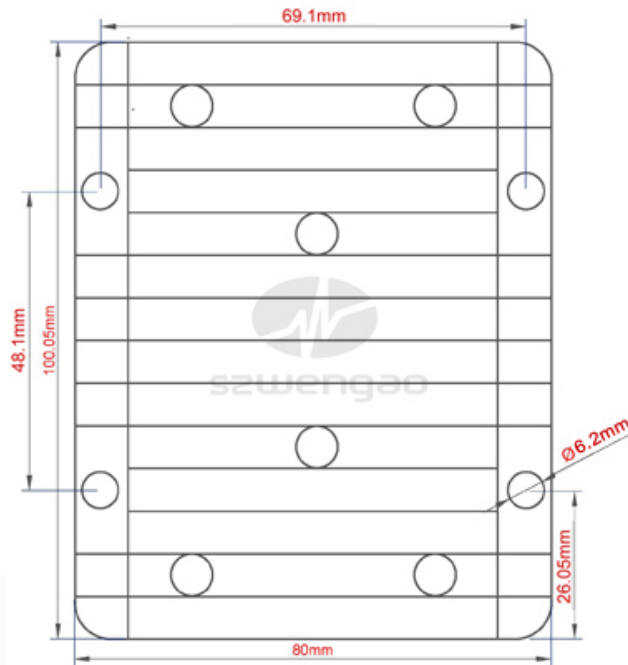

Shell installation diagram

Thickness : 39mm



Shenzhen Wengao Electronic Co., Ltd

A: 2/F A, Bldg.A2, Anle Ind. Hangcheng RD., Xixiang Street, Baoan Dist., Shenzhen, China 518102

T: +86 755 29418061

F: +86 755 29418061

E: info@wengaoelec.com

W: www.wengaoelec.com